

KC40

HIGH EFFICIENCY POLYCRYSTALLINE PHOTOVOLTAIC MODULE



Kyocera is "ISO9001" and "ISO14001" certified and registered.
 TÜV dot COM Internet platform for tested quality and service ID 8411005400.

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient polycrystalline photovoltaic module.

The conversion efficiency of the Kyocera solar cell is over 14%.

These cells are encapsulated between a tempered glass cover and an EVA pottant with back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation. Equipped with plug in connectors.

APPLICATIONS

Grid-Connected Systems

- Residential Solar Power Systems
- Public and Industrial Solar Power Systems

Stand-Alone Solar Power Systems for

- Villages in remote areas
- Homes and summer cottages
- Microwave / Radio repeater stations
- Medical facilities in rural areas

- Emergency communication
- Water quality and environmental data monitoring
- Drinking water and livestock water pumping
- Small-scale irrigation pumping
- Cathodic protection
- Aviation obstruction lights
- Environmental data monitoring
- Railway signals
- Street lighting
- Small-scale desalination

LIMITED PERFORMANCE WARRANTY


※2 years limited warranty on material and workmanship

※25 years limited warranty on power output.


(Long term output warranty shall guarantee that loss of output is not more than 10% of the minimum warranty value of the product specifications within 12 years and is not more than 20% within 25 years after the purchase of the product by customer. The output value shall be measured according to KYOCERA warranty conditions.)

ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC40 at various cell temperatures

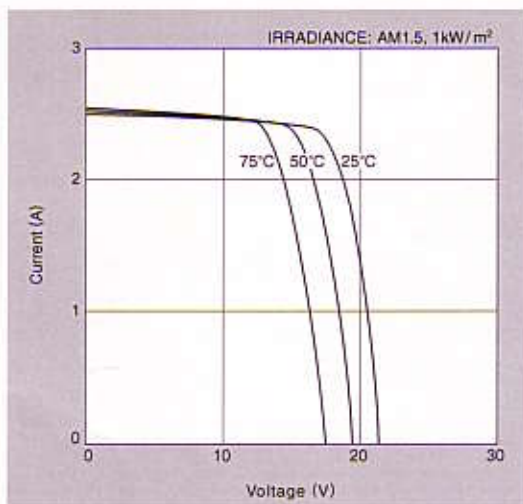

Current-Voltage characteristics of Photovoltaic Module KC40 at various irradiance levels

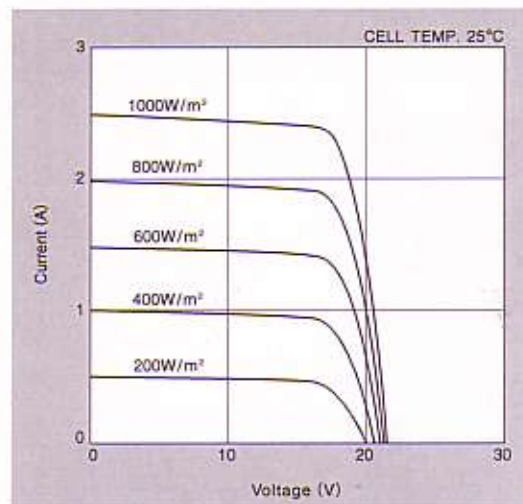


MODEL
KC40

SPECIFICATIONS

Physical Specifications

(Unit : mm)

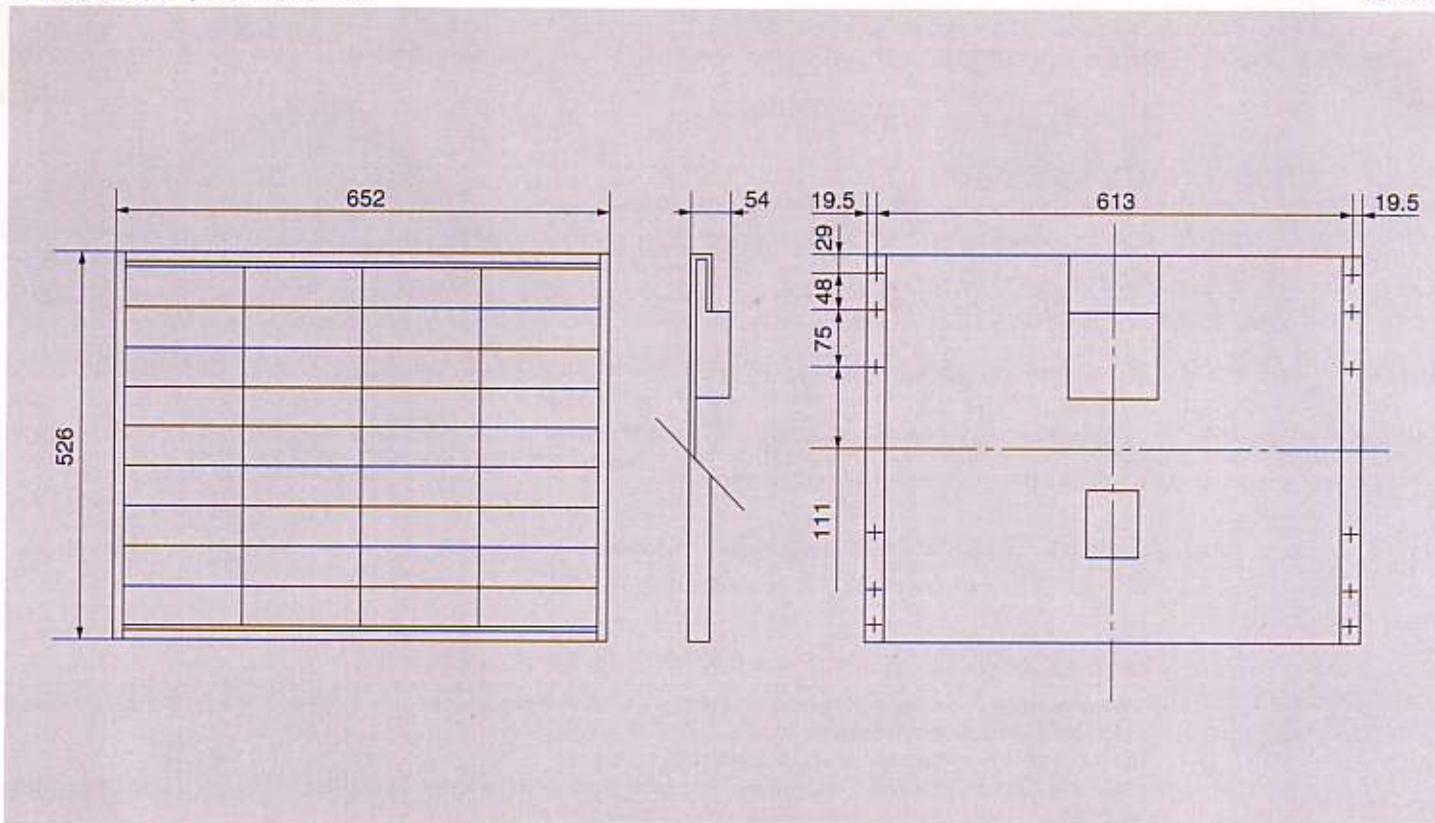

Specifications

| Electrical Data | | |
|-----------------------------|----------|------------------------|
| Maximum Power(Pmax) | [W] | 40 |
| Tolerance | [%] | ±10 |
| Maximum Power Voltage | [V] | 16.9 |
| Maximum Power Current | [A] | 2.34 |
| Open Circuit Voltage (Voc) | [V] | 21.5 |
| Short Circuit Current (Isc) | [A] | 2.48 |
| Temp. coefficient of Voc | [V/°C] | -8.24×10 ⁻² |
| Temp. coefficient of Isc | [A/°C] | 2.03×10 ⁻³ |
| NOCT | [°C] | 47 |
| Max System Voltage | [V] | 750 |

| Dimension | | |
|-------------------|--------|-----|
| Length | [mm] | 526 |
| Width | [mm] | 652 |
| Depth without box | [mm] | 36 |
| Weight | [kg] | 4.5 |

| Cells | |
|-------------------|-----------------|
| Number per module | 36 |
| Cell Technology | Polycrystalline |
| Cell Shape | Rectangular |

Note : The electrical specifications are under test conditions of irradiance of 1kw/m², Spectrum of 1.5 air mass and cell temperature of 25°C.
Kyocera reserves the right to modify these specifications without notice.

Please contact our office to obtain details without hesitation.



KYOCERA Corporation

KYOCERA HEAD OFFICE

SOLAR ENERGY DIVISION
6 Takeda Tobadono-cho
Fushimi-ku, Kyoto
612-8501 Japan
Phone:(81)75-604-3476 Telefax:(81)75-604-3475
http://www.kyocera.co.jp

● KYOCERA Fin ceramics GmbH

Fritz-Mueller-Str. 107, 73730 Esslingen, Germany
Phone:(49)711-93934-17, Telefax:(49)711-93934-50
http://www.kyocerasolar.de
E-mail:solar@kyocera.de

● KYOCERA ASIA PACIFIC PTE. LTD.

298 Tiong Bahru Road, #13-03/05
Central Plaza, Singapore 168730
Phone:(65)271-0500 Telefax:(65)271-0600

● KYOCERA Solar, Inc.

7812 East Acoma Drive
Scottsdale, AZ 85260
Phone:(480)948-8003 or (800)223-9580 Telefax:(480)483-6431